


SE-TEN-TBF 1600R está compuesto por 14 núcleos híbridos (goma + sistema helicoidal) y una tecnología antivuelco para aportar una mayor seguridad.

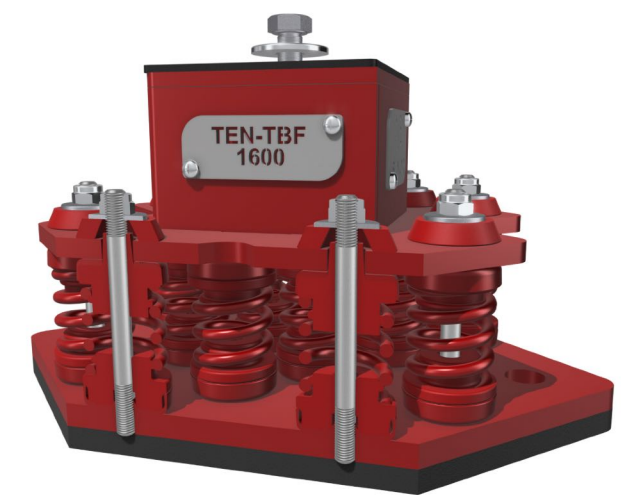

CARGA (Kg)	FLECHA (mm)	FRECUENCIA RESONANCIA (Hz)	BARRIDO (Hz)		GRADO DE AISLAMIENTO (%)	
			15	50		
798	9,95	5,75	15	50	82,77	98,66
959	11,15	4,25	15	50	91,27	99,27
1124	12,33	3,87	15	50	92,87	99,40
1362	14,08	3,65	15	50	93,71	99,46
1537	15,24	3,43	15	50	94,48	99,53
1694	16,33	3,05	15	50	95,69	99,63

TITLE
SE-TEN-TBF 1600R

UNITS mm ÁNG. PROJ. SIZE A3 SCALE 1:3 LAST UPDATED