



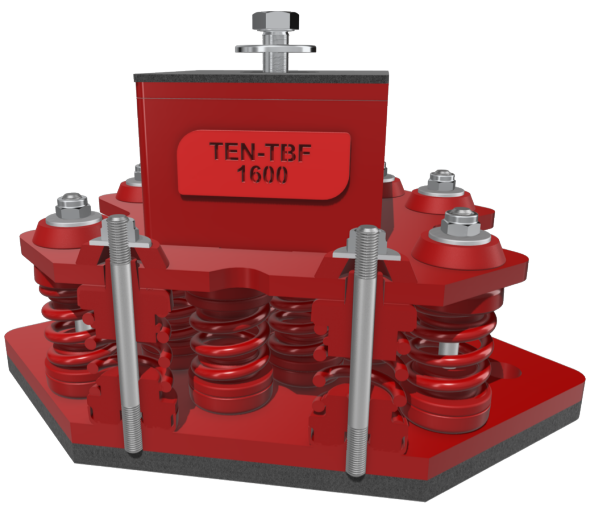

SE-TEN-TBF 1600R est composé de 14 amortisseurs hybrides (gomme + système hélicoïdal) et une technologie anti-basculement pour apporter plus de sécurité.

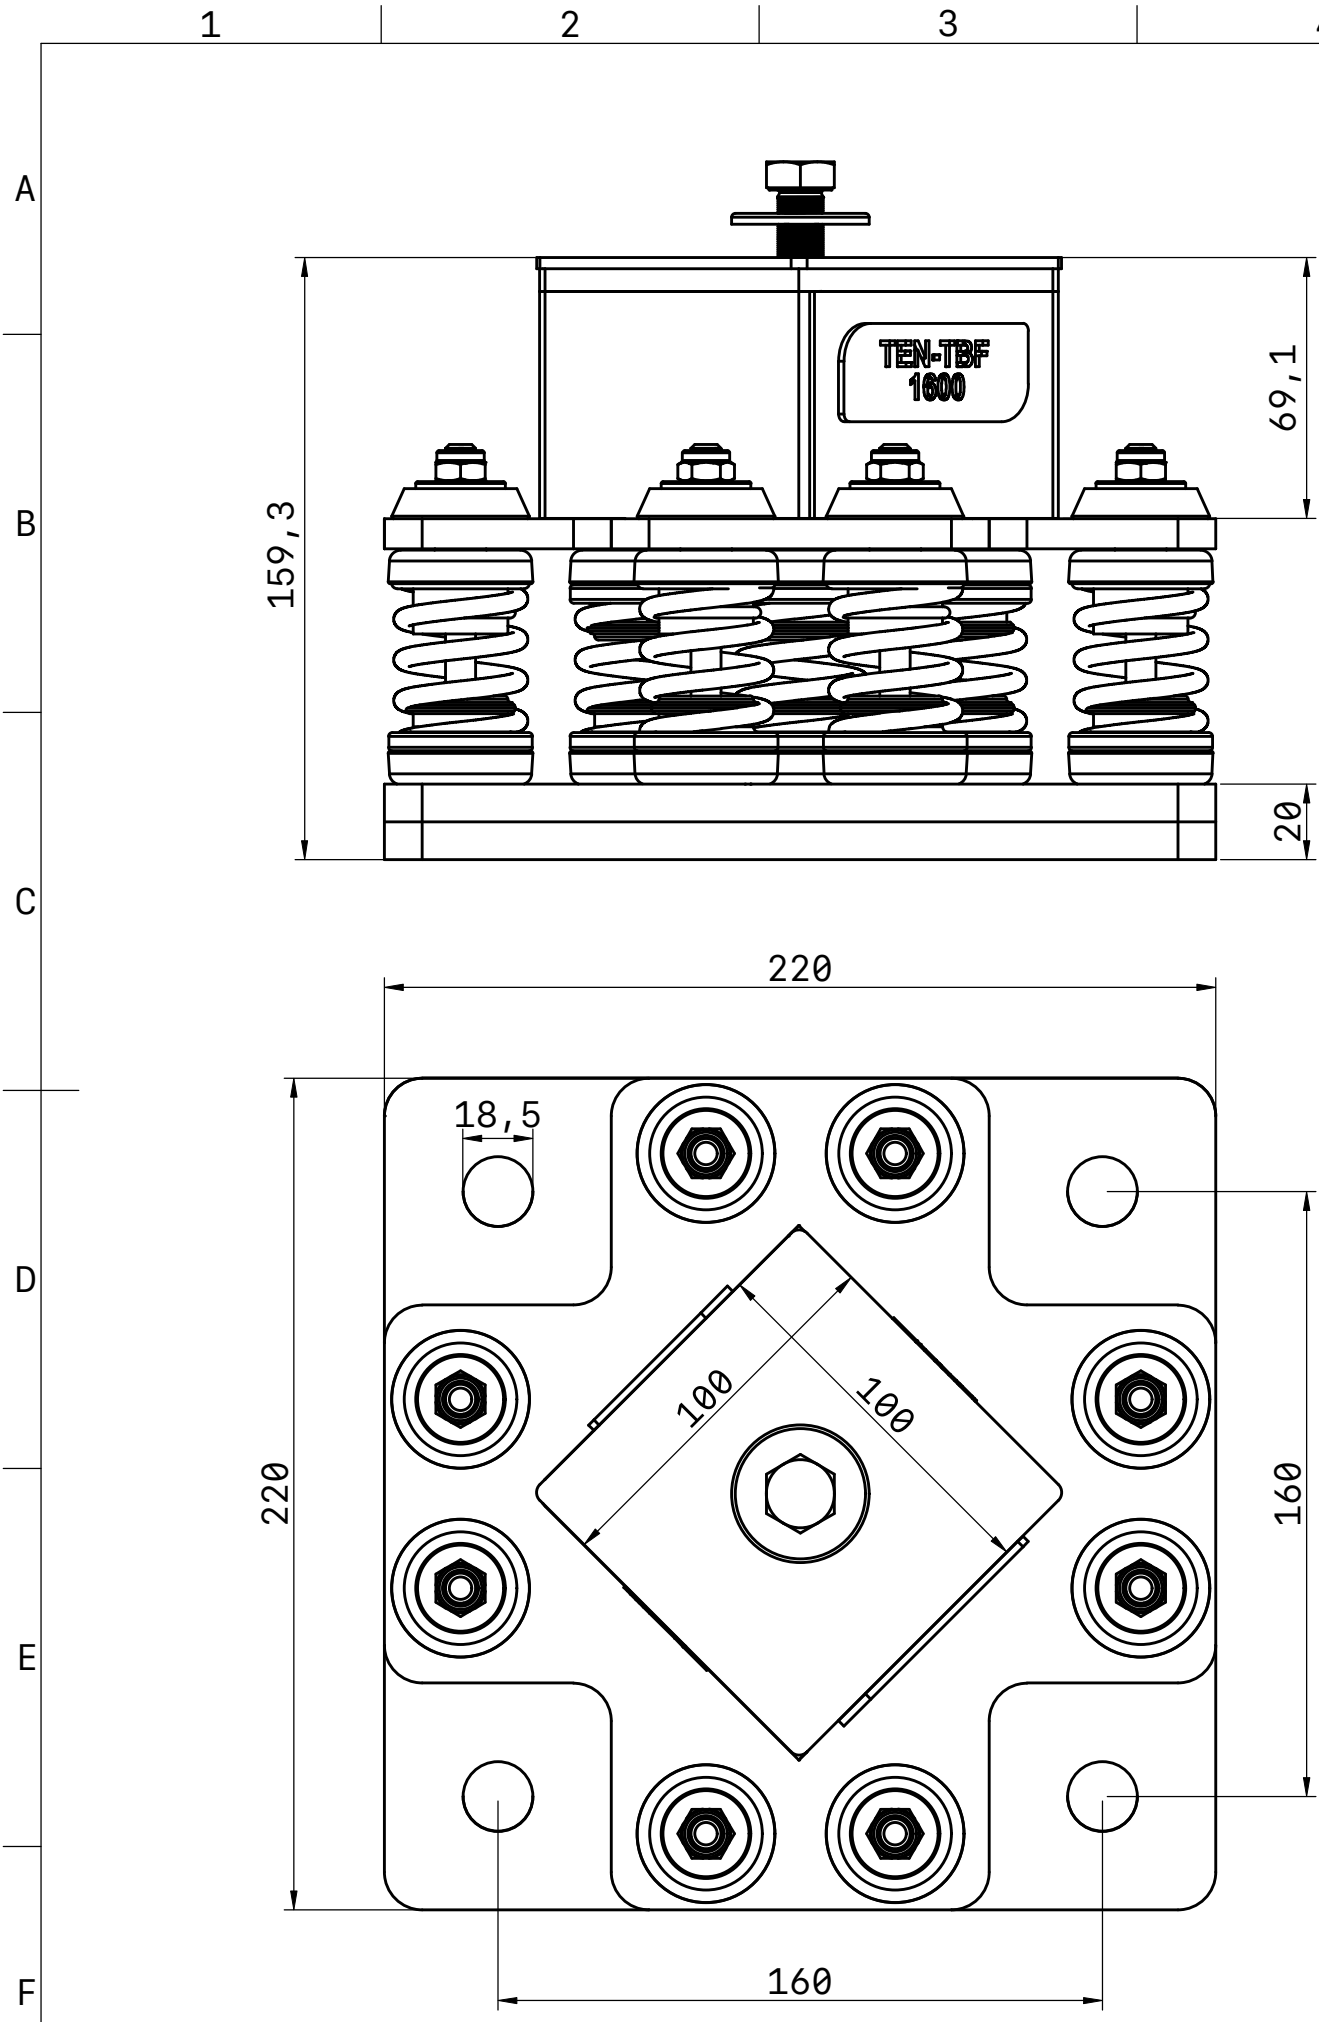

CHARGE (Kg)	FLÈCHE (mm)	FRÉQUENCE DE RÉSONNANCE (Hz)	BALAYAGE (Hz)		DEGRÉ D'ISOLATION (%)	
798	9,95	5,75	15	50	82,77	98,66
959	11,15	4,25	15	50	91,27	99,27
1124	12,33	3,87	15	50	92,87	99,40
1362	14,08	3,65	15	50	93,71	99,46
1537	15,24	3,43	15	50	94,48	99,53
1694	16,33	3,05	15	50	95,69	99,63