

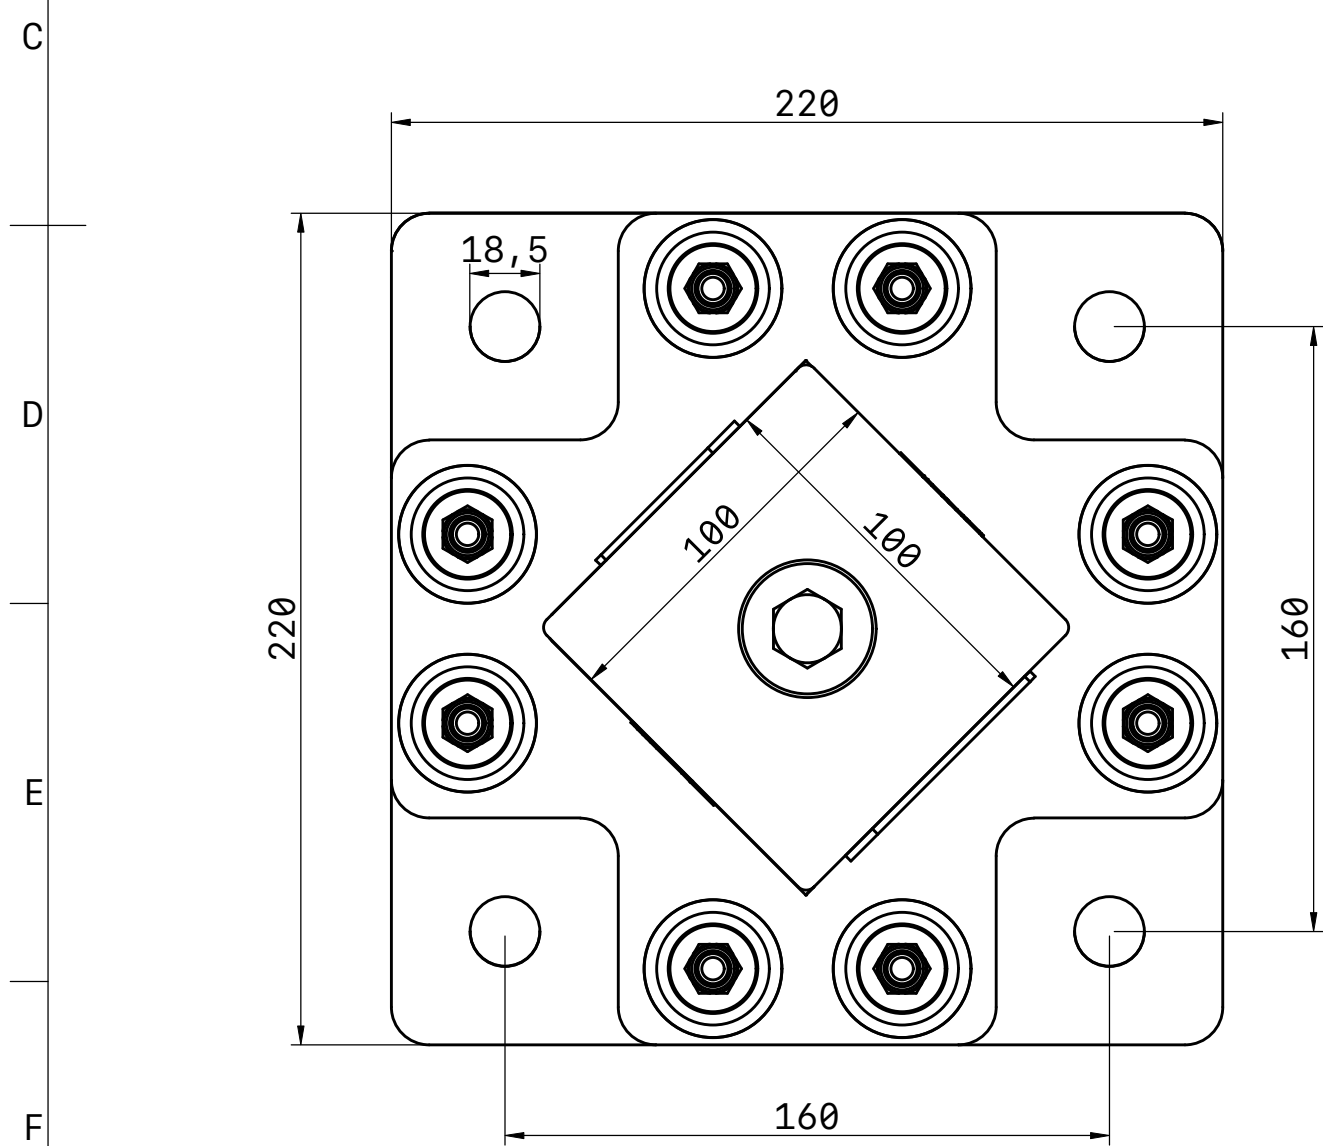
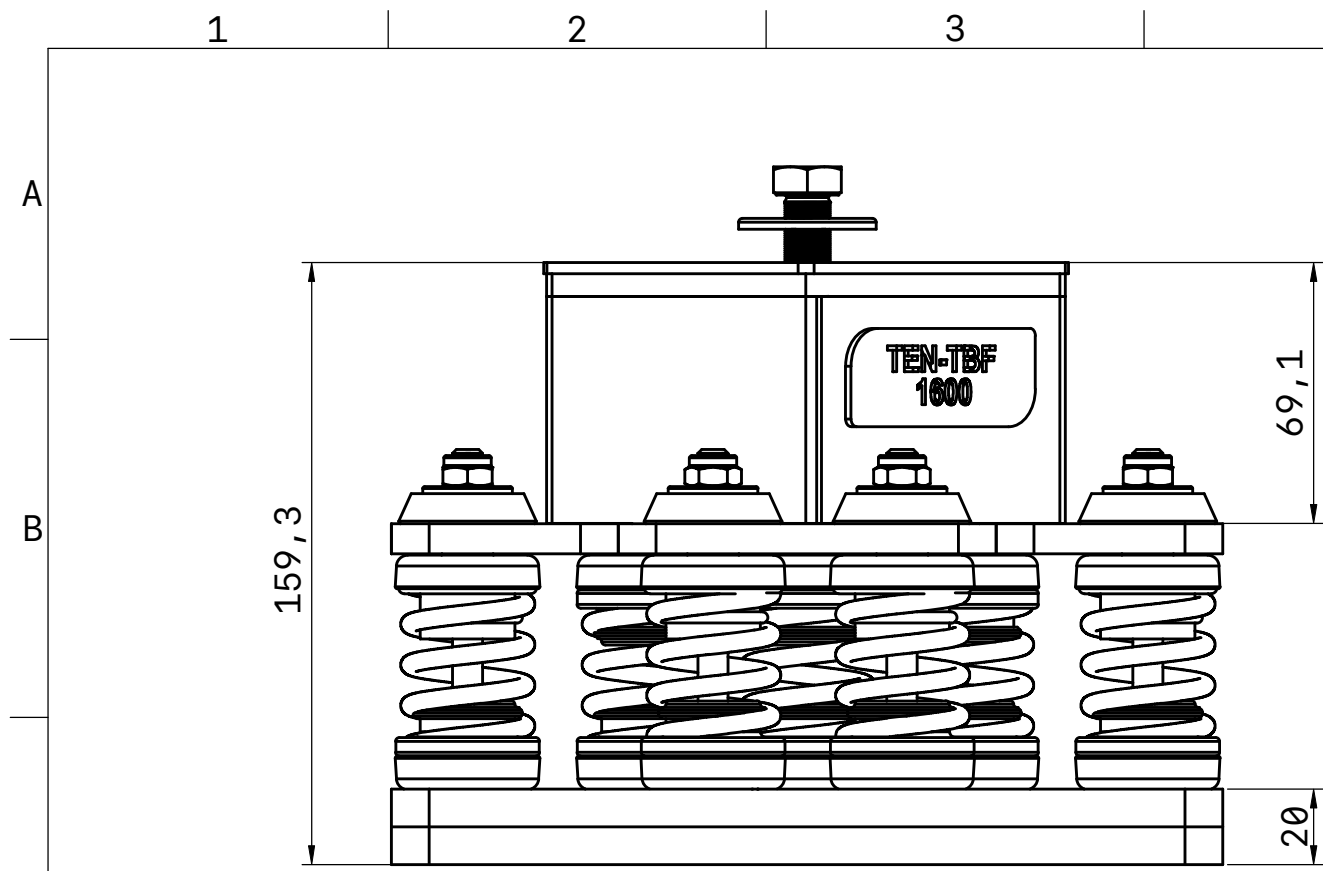


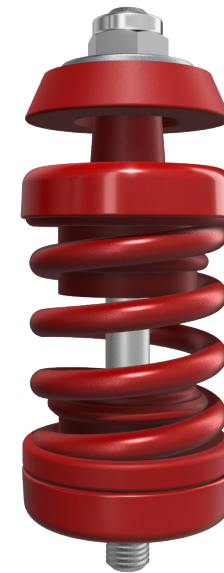

SE-TEN-TBF 1600R besteht aus 14 Hybrid-Kernen (Gummi+Spiralsystem) und Anti-Kipp-Technologie für erhöhte Sicherheit.

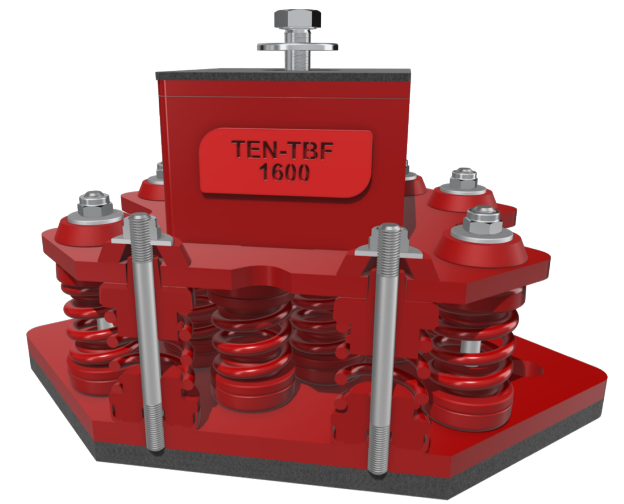

LAST (Kg)	FORMUNG (mm)	FREQ. RESONANZ (Hz)	INTERVALL (Hz)		ISOLIERUNG (%)	
			15	50	82,77	98,66
798	9,95	5,75	15	50	82,77	98,66
959	11,15	4,25	15	50	91,27	99,27
1124	12,33	3,87	15	50	92,87	99,40
1362	14,08	3,65	15	50	93,71	99,46
1537	15,24	3,43	15	50	94,48	99,53
1694	16,33	3,05	15	50	95,69	99,63

TITLE
FACHLEUTE

SE-TEN-TBF 1600R

UNITS
mm

ÁNG. PROJ.

SIZE
A3

SCALE
1:2

LAST UPDATED