

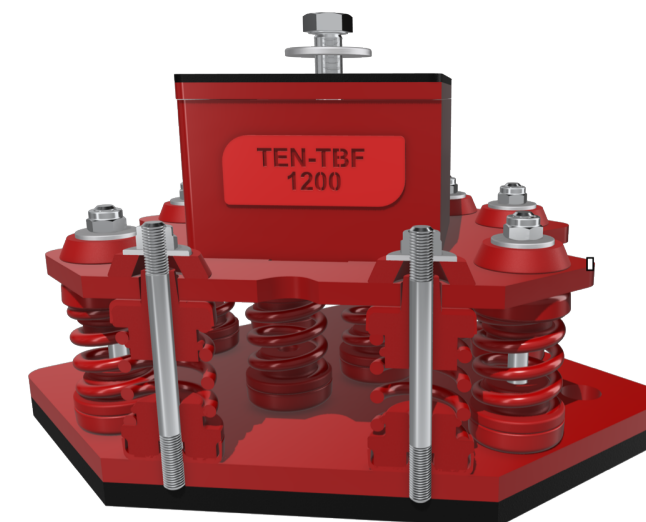
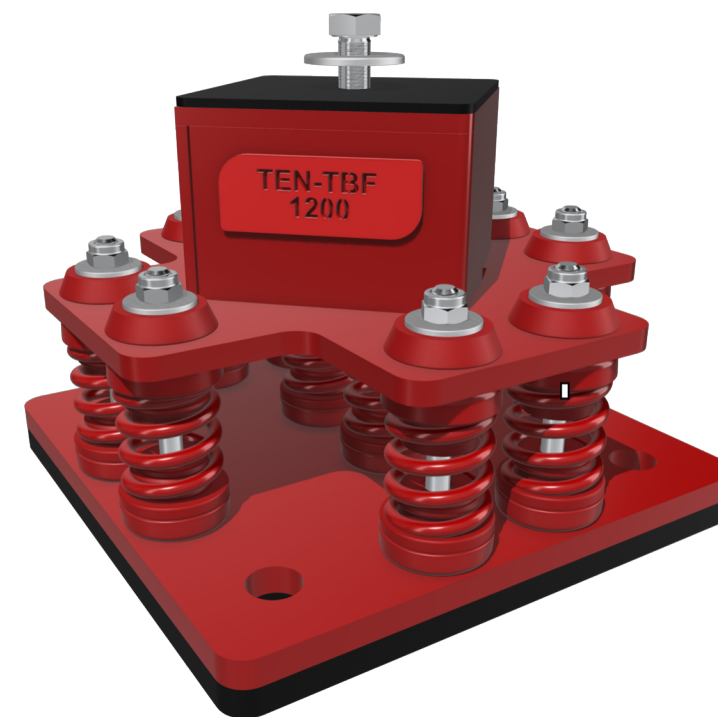


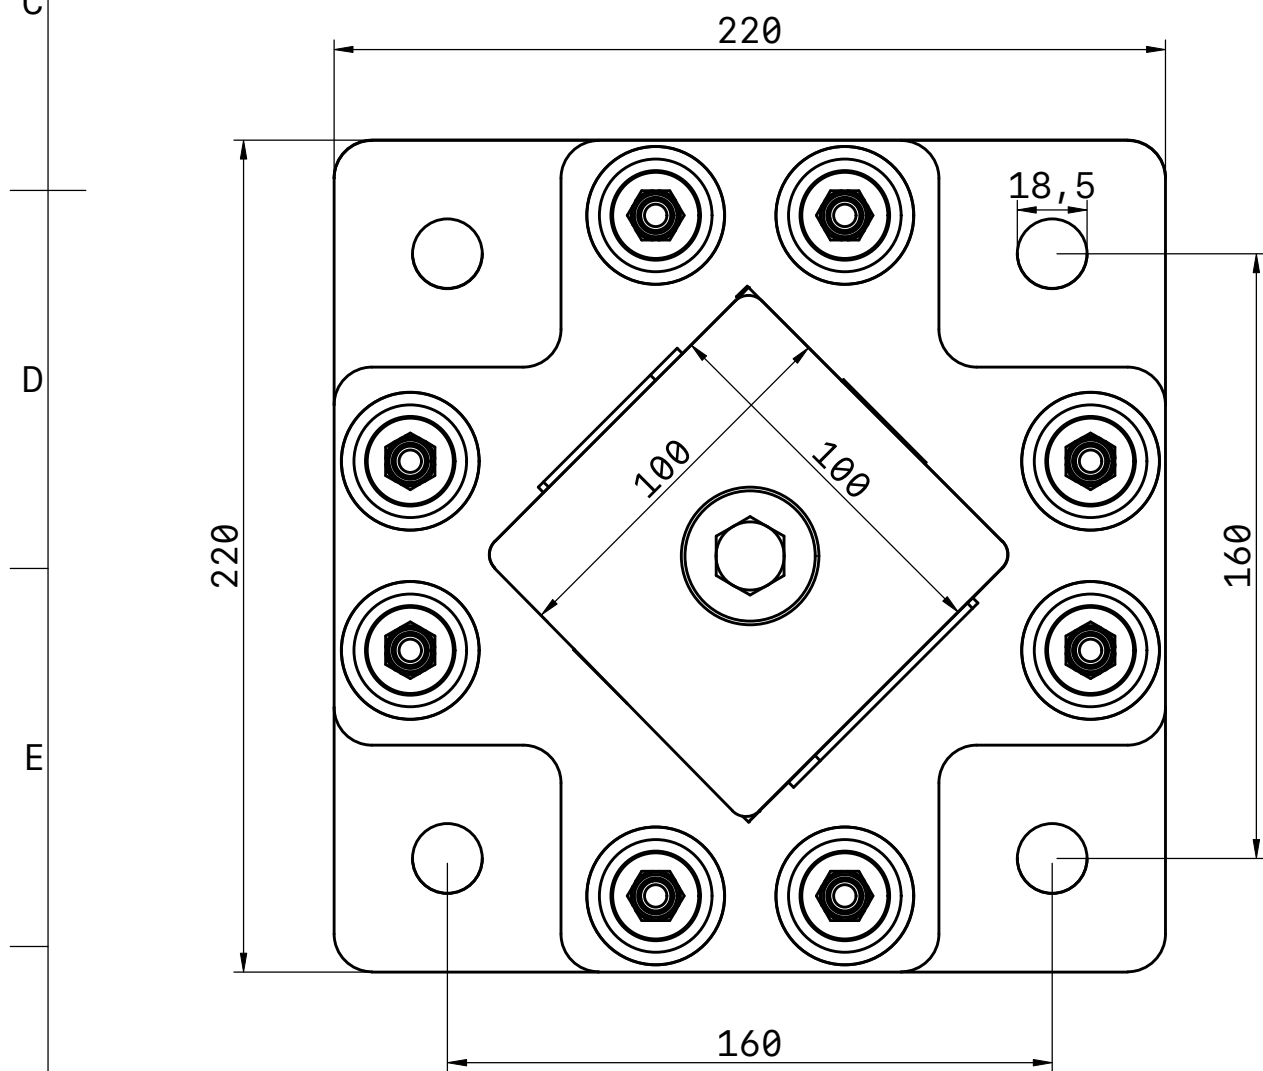

The SE-TEN-TBF 1200R is composed of 10 hybrid cores (rubber + helical system) and an anti-roll technology for increased safety.

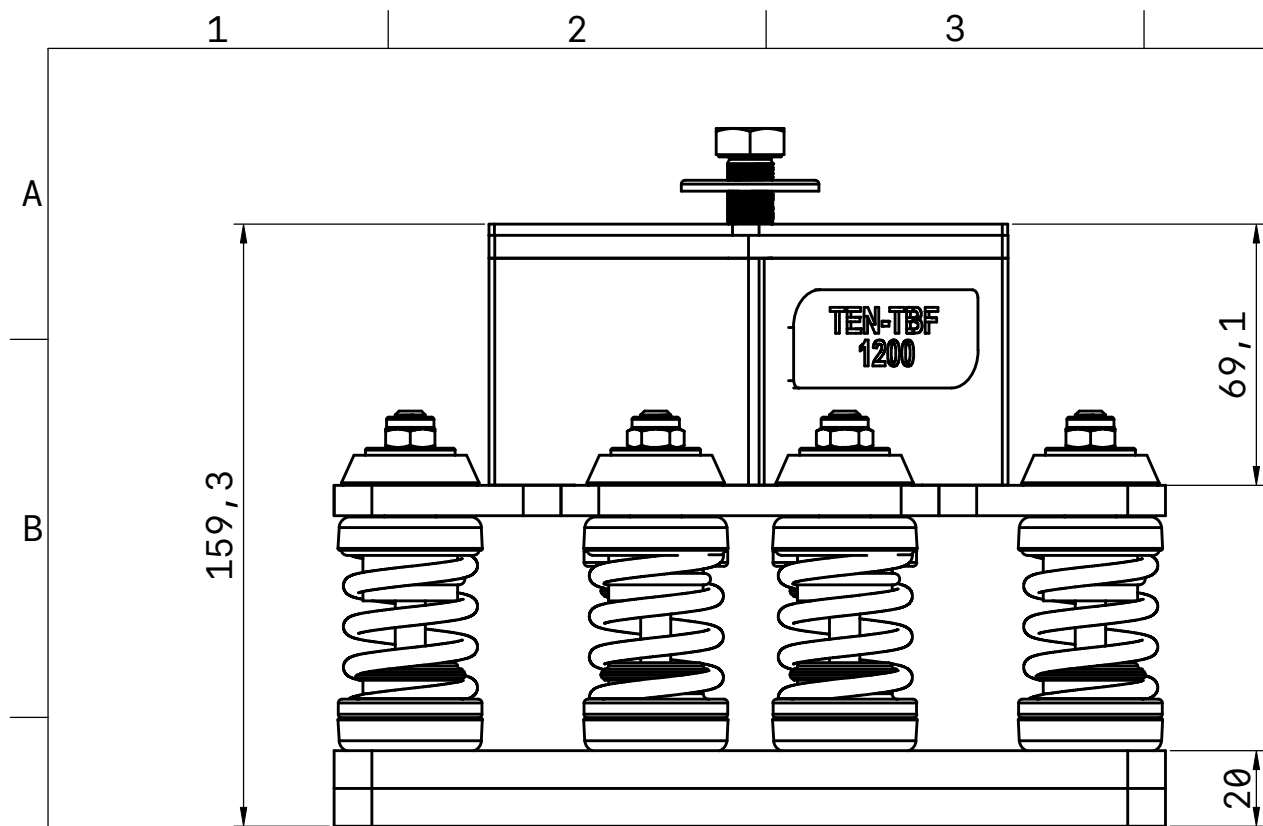

LOAD (Kg)	DEFORMATION (mm)	RESONANCE FREQUENCY (Hz)	SWEEP (Hz)		SOUNDPROOFING LEVEL (%)	
			15	50	82,77	98,66
570	9,95	5,75	15	50	82,77	98,66
685	11,15	4,25	15	50	91,27	99,27
803	12,33	3,87	15	50	92,87	99,40
973	14,08	3,65	15	50	93,71	99,46
1098	15,24	3,43	15	50	94,48	99,53
1210	16,33	3,05	15	50	95,69	99,63

TÍTULO
TECHNICAL DATA

SE-TEN-TBF 1200R

UNIDADES
mm

ÁNG. PROY.

TAMAÑO
A3

ESCALA
1:2

ÚLTIMA ACTUALIZACIÓN