


SENROR TBMF-ADAPTA (Anti-Tilt)



SENROR Products
Split DOMESTIC

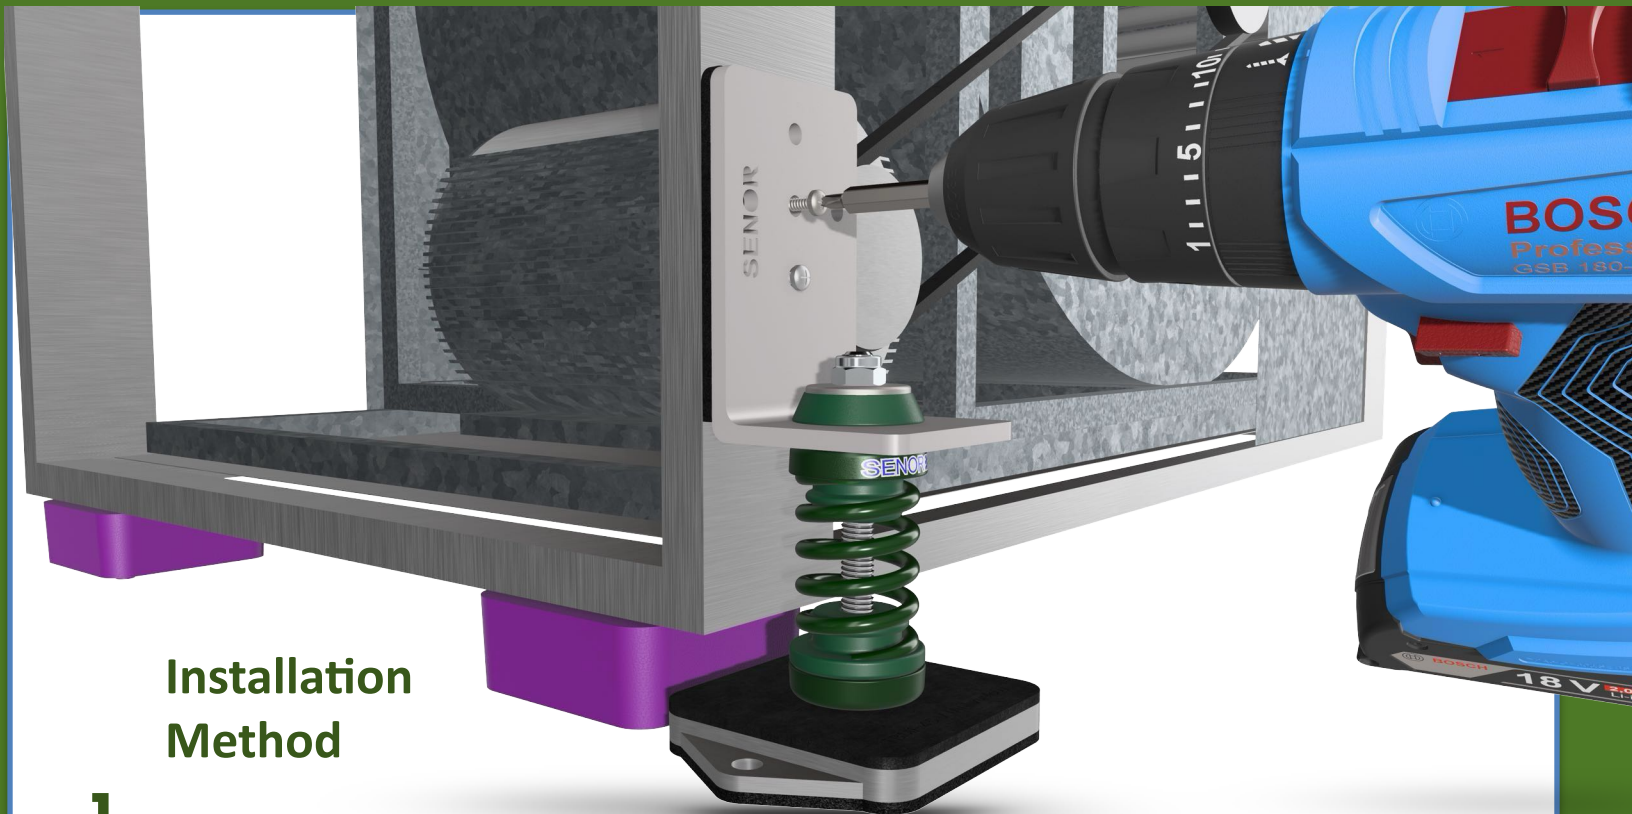

Installation Method

1.

We carefully remove the product from its packaging, strategically placing it next to the equipment we wish to adequately protect from noises and vibrations that may affect its performance. Next, we proceed to secure the isolation device to one side of the equipment, ensuring that the space between both elements is minimized without altering the height of the equipment, so that it remains in the same original position. This technique not only optimizes the use of space but also ensures an efficient installation that maximizes the effectiveness of the noise and vibration reduction system.

2.

Once all the ends have been precisely secured, we will proceed to remove the old rubber mounts. This action is necessary to free the machinery from any unnecessary support, allowing the equipment to settle completely onto the new acoustic supports, which are specifically designed to improve and minimize vibrations. In this way, we guarantee a smooth and effective transition to a support system that promotes more stable and efficient operation.

