
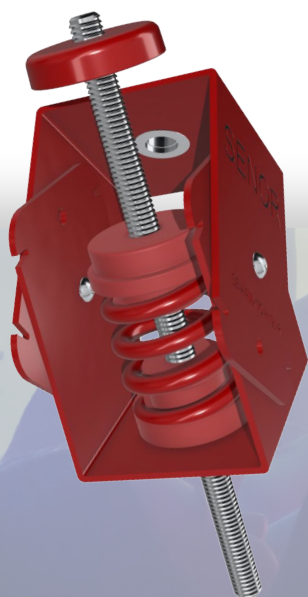


# SEÑOR A4MIXTO-H 120 R

## HYBRID DAMPER WITH DOUBLE METRIC OUTLET AND ANGLE CORRECTOR FOR SUSPENDING HVAC EQUIPMENT

It is a high-performance, innovative, and upgraded **HYBRID** damper. Manufactured using cutting-edge technology and designed to suppress all solid-borne acoustic pollution.

The **A4MIXTO-H 120 R** features a robust steel frame with an innovative dual rotary joint mechanism (**RT-10**). This design enables precise angle adjustment between the two independently functioning metric outputs, providing remarkable versatility. This functionality is crucial in ensuring that the elastic component's compression remains strictly axial, preventing any torsion that could compromise its integrity. By limiting the vectorial degrees of polymer deformation, the system optimizes the elastic component's performance, ultimately enhancing durability and operational efficiency. For instance, in applications that require continuous and precise movement, this mechanism minimizes the risk of structural failure and ensures smooth, reliable operation.

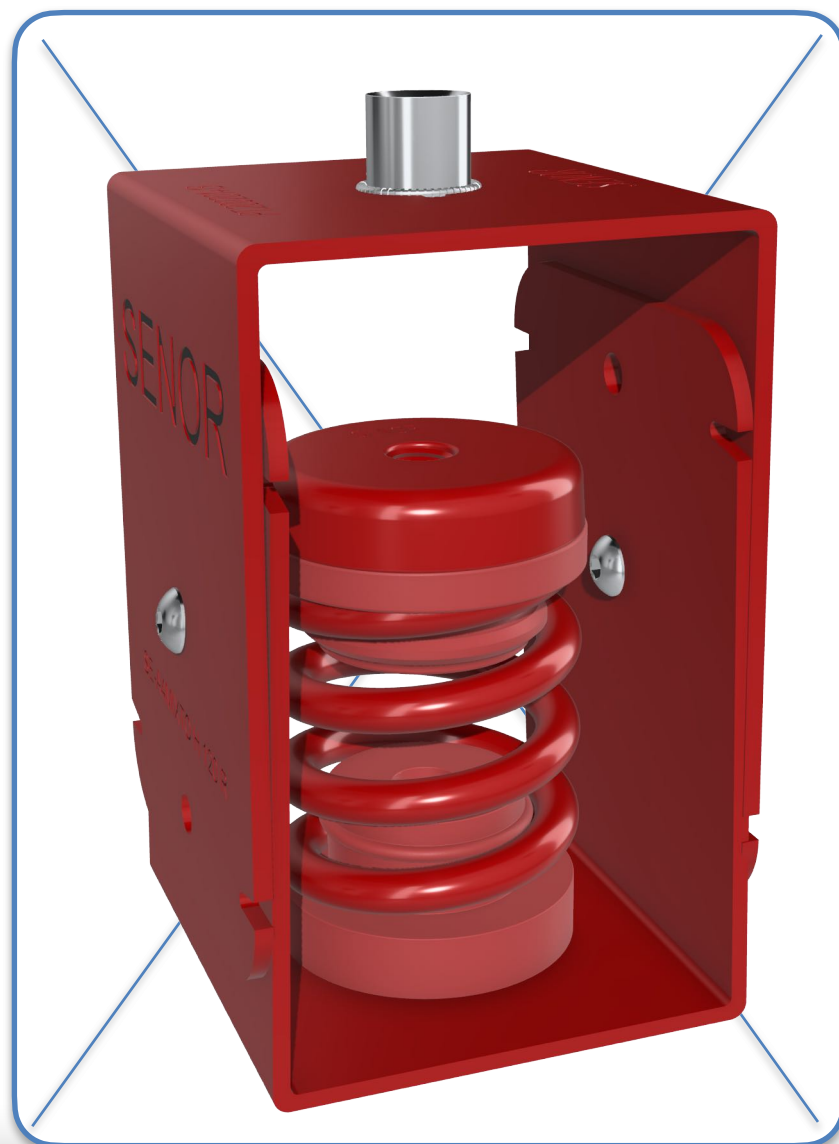

**I+D+i**

\*System registered with the  
Spanish Patent and  
Trademark Office (OEPM).

| REF                | COLOUR                                                                                | APPLICATION FIELD | LOAD (Kg)<br>MIN-MAX | METRIC |
|--------------------|---------------------------------------------------------------------------------------|-------------------|----------------------|--------|
| SE-A4MIXTO-H 120 R |  | HVAC              | 60 - 120             | 8      |

**HYBRID System:** The result of combining the most advanced polymer with a helical steel spring.

- Helical Spring: Manufactured using steel wire in accordance with **DIN 2095-UNE EN 10270** standards, featuring an anti-corrosion finish and **metallic red epoxy** coating.
- Rubber Polymer: Manufactured by KRAIBURG-TPE for SEÑOR, following UNE-EN ISO 10846-1:2009 standards.

✓ Resonance Frequency: 3-7Hz


**Recommended for USE:** with acoustic ceilings, structure suspensions, and machinery with an operational frequency above 350 RPM and a load ranging between 60 and 120 kg per support point.

**Dynamic Behaviour and Axial Deformation**

Steel helical springs exhibit dynamic stiffness equivalent to their static stiffness, making them ideal for applications that demand predictable mechanical properties. In contrast, viscoelastic materials exhibit more complex behavior. The dynamic stiffness of these materials never equals their static stiffness, as they absorb and dissipate energy, adapting to the frequency and magnitude of vibrations. To fully understand this phenomenon, the dynamic behavior of viscoelastic materials cannot be determined through theoretical calculations alone; it requires specific laboratory testing to ensure accurate data for industrial applications.

TABLE AND GRAPH OF LAB RESULTS


| LOAD (Kg) | DEFORMATION (mm) | RESONANCE FREQUENCY (Hz) | SWEEP (Hz) | % SOUNDPROOFING |
|-----------|------------------|--------------------------|------------|-----------------|
| 60        | 11,86            | 5,75                     | 50         | 98,66           |
| 75        | 14,56            | 4,93                     |            | 99,02           |
| 90        | 16,31            | 3,87                     |            | 99,40           |
| 101       | 18,30            | 3,60                     |            | 99,48           |
| 113       | 19,58            | 3,17                     |            | 99,60           |
| 120       | 21,18            | 3,01                     |            | 99,64           |

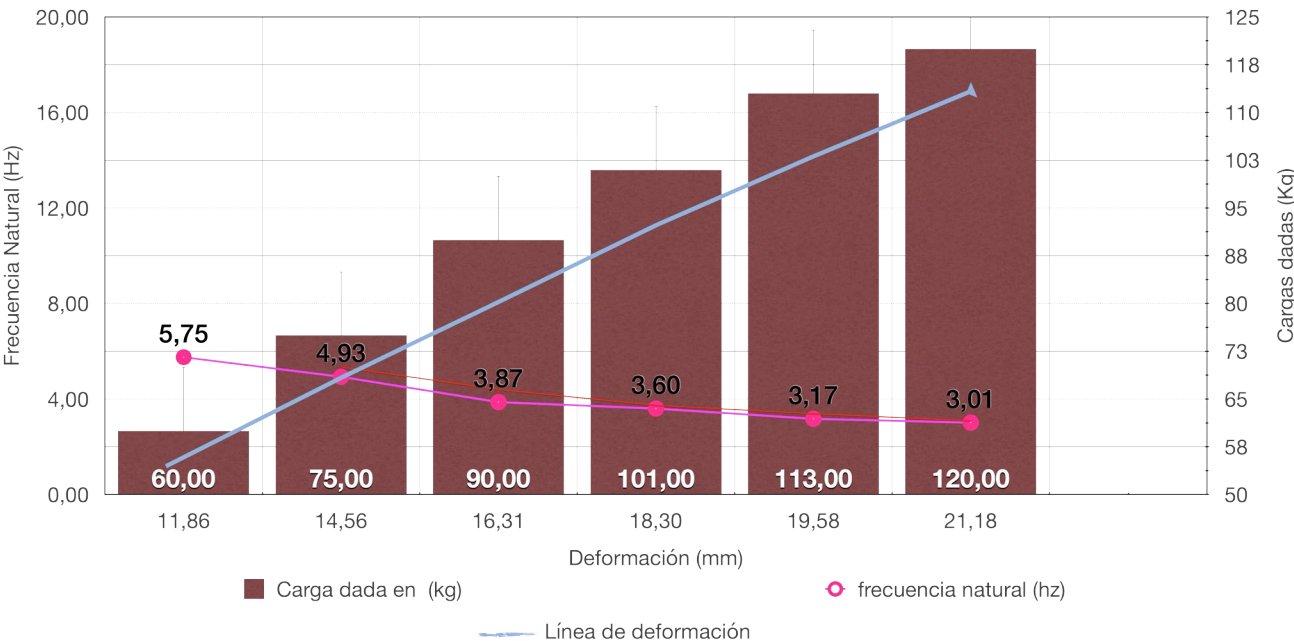


## Dimensions

You'll be surprised by its performance! It's the ideal damper for equipment suspension. Say NO to noise.

**VISTA  
LATERAL**

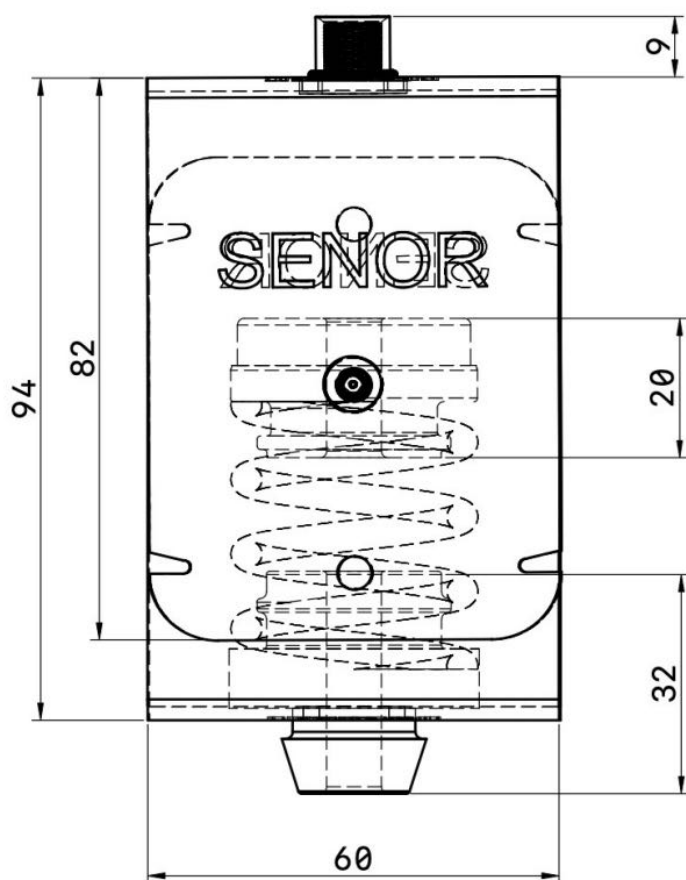


**VISTA  
FRONTAL**

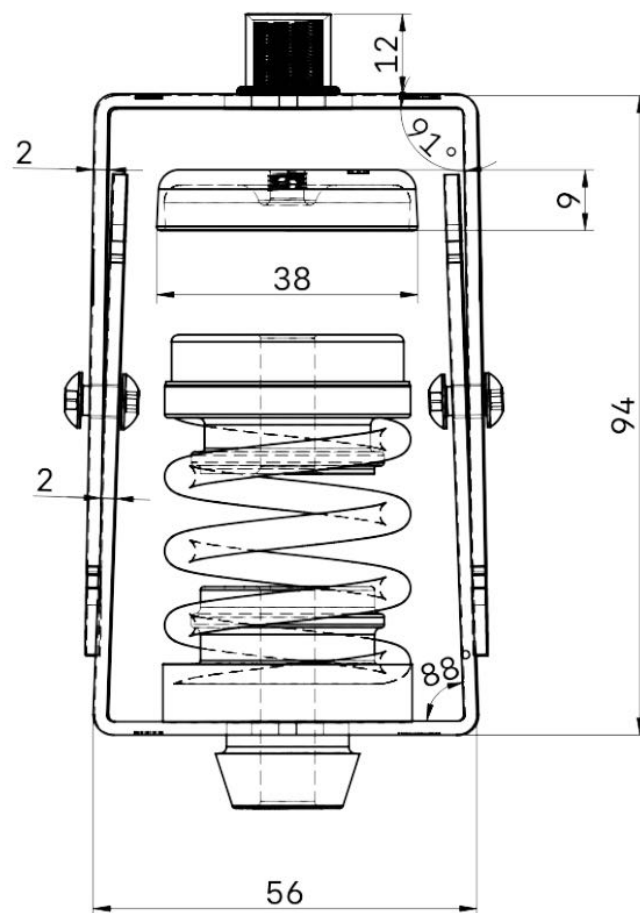

M8

# SENOR A4MIXTO-H 120 R

 Youtube  
SENOR Acoustic Dampers



SENOR Products  
Suspended Machines

## KEY Features

**A4MIXTO-H 120 R** is the most powerful damper on the market for suspending equipment. It is the present and future solution for noisy spaces.

Our engineers work every day to develop new solutions for the future.

**A: The TC6/EXN Rubber Top Cap** is distinguished by its design with an extended collar, an innovative feature that prevents unwanted contact between the threaded rod and the steel housing. This is critical for ensuring both the durability and performance of the system in which it is used. This component serves not only as a physical decoupler but also plays a pivotal role in vibration damping. Its ability to effectively reduce vibrations in the mid-to-high-frequency range (measured in hertz, Hz) makes it an ideal solution for applications where stability and smooth operation are paramount. Furthermore, its design guarantees the proper seating of the helical wire of the spring, enhancing the overall functioning of the mechanism, preventing premature wear, and extending the service life of the components involved.


**B: The Steel Helical Spring** is recognized for its ability to effectively eliminate vibro-mechanical energy contamination, particularly in the mid and low-frequency ranges, typically within the hertz (Hz) spectrum. This spring is designed to absorb and dissipate unwanted vibrations, making it an ideal solution for applications where stability and noise control are critical.

**C: The STEEL housing** is crafted from high-quality galvanized steel, specifically of type Dx51d + Z275, providing excellent corrosion resistance and long-lasting durability in harsh environments. With a thickness of 2 mm, this structure not only offers substantial rigidity to the system but also plays a vital role in the axial compression of the elastic components, ensuring they maintain optimal performance and stability under load. This robustness is crucial for industrial applications requiring safe and efficient handling of dynamic forces.

**D: CN The Leveling Cup** is made from DC04 deepdrawing steel, compliant with the EN10131 steel standard, and has a thickness of 1.5 mm. It is designed to withstand heavy loads.

Note:

All metal components are treated with an anti-corrosion coating to prevent material corrosion.

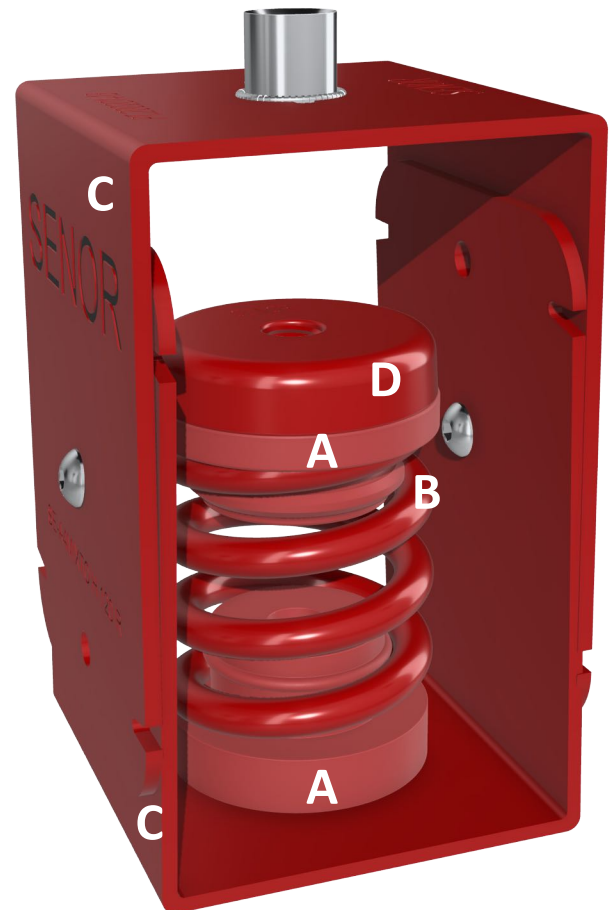

# SENROR A4MIXTO-H 120 R

 Youtube  
SENROR Acoustic Dampers




SENROR Products  
Suspended Machines


## Application Mode




**1.**  
Bend the casing.

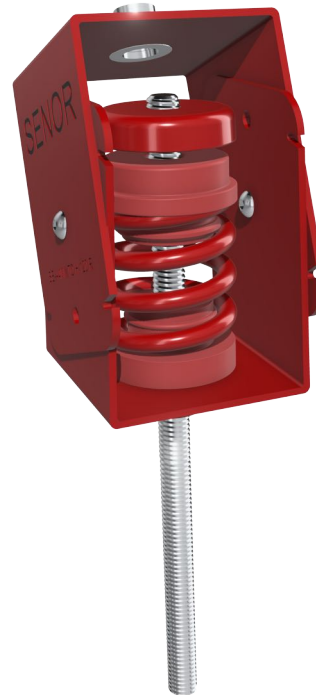

**2.**  
Screw the cup onto the rod previously inserted  
into the bottom of the acoustic insulator.



**3.**  
Return the casing to the desired  
position.

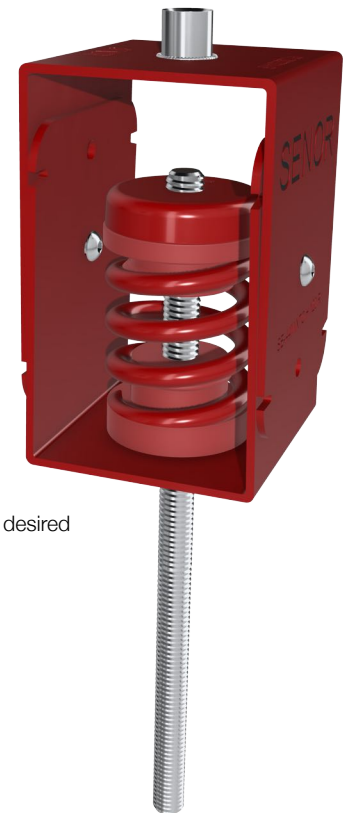

**4.**  
Secure the acoustic insulator directly to the floor slab.

